


Technische Daten:
Glastürscharnier - Aksun

Datasheet:
Glass door hinge - Aksun


Art. 41.0202.000.10

Art. 41.0202.000.12

Art. 41.0202.000.26



Ausführung:
Options:




6 mm
-
10 mm



800 mm
max.



45 kg max.



DIN links/left
+
DIN rechts/right



Material:

V2A

Material:

Stainless steel AISI 304

Gewicht: / Weight: 0,294 kg

Oberflächen:

Edelstahl-Design

Finish:



Stainless steel design

Chrom-Design

Chrome design

Anthrazit-Design

Anthracite design

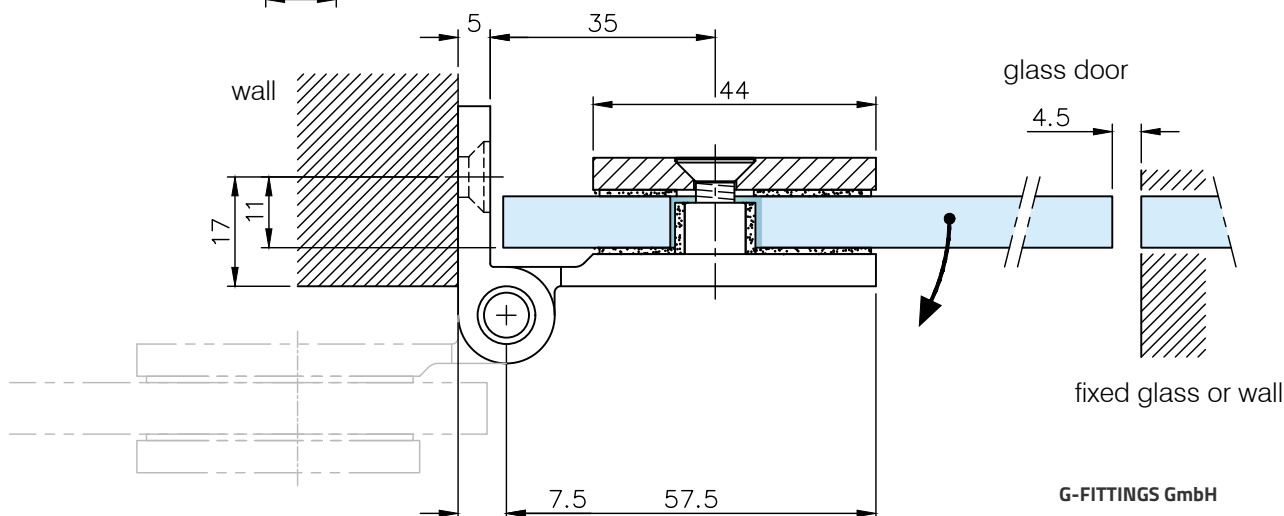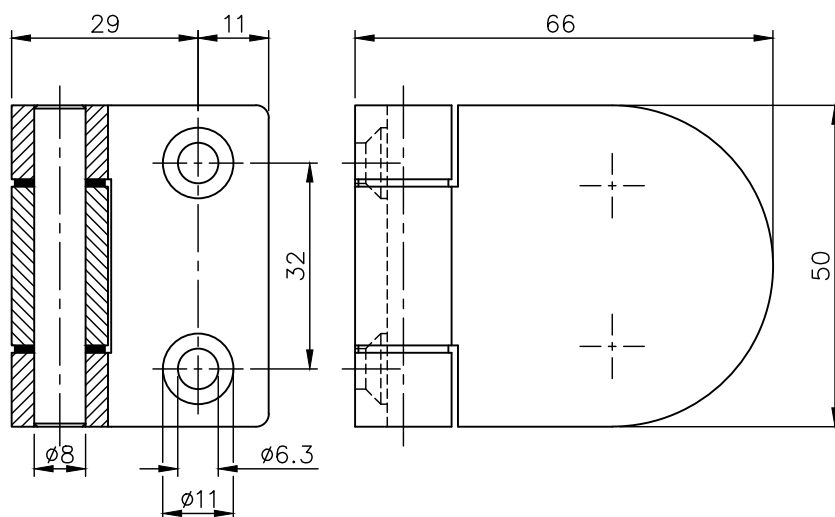

*drawing shows
8mm glass

G-FITTINGS GmbH

Marie-Curie-Straße 16-18

46446 Emmerich am Rhein



T +49 (0)2822 962 0

F +49 (0)2822 962 221

E sales@g-fittings.com

Art. 41.0202.000.10
Art. 41.0202.000.12
Art. 41.0202.000.26

Glasbearbeitung:
Glass preparation:

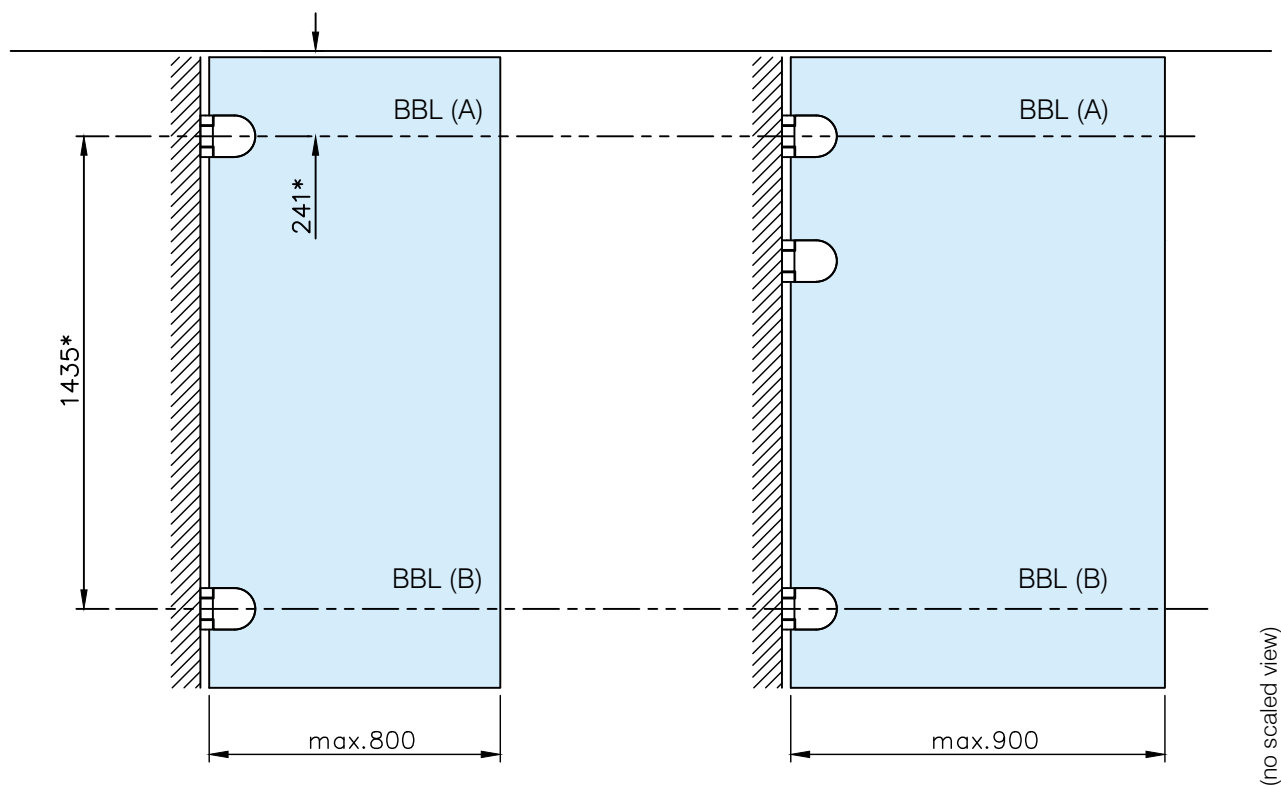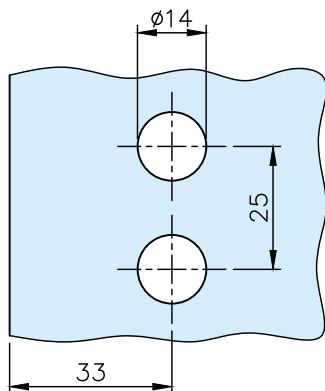

(no scaled view)

G-FITTINGS GmbH

Marie-Curie-Straße 16-18
46446 Emmerich am Rhein
T +49 (0)2822 962 0
F +49 (0)2822 962 221
E sales@g-fittings.com

Empfehlungsmaße entsprechend *DIN 18268 Recommended dimensions according to *DIN 18268		
Glastürhöhe Glass door height	Abstand Zargenfalz - BBL(A) distance frame rebate - BBL(A)	Abstand BBL(A) - BBL(B) distance BBL(A) - BBL(B)
1860 mm - 2110 mm	241 +1 mm	1435 mm ±0,5 mm
2111 mm - 2235 mm	241 +1 mm	1560 mm ±0,5 mm
2236 mm - 2360 mm	241 +1 mm	1685 mm ±0,5 mm