


# 1 APP link, code

IOS system searches for "OPK" in the App Store | Android system downloads from OPK website


01. Open the app




02. Click optional position

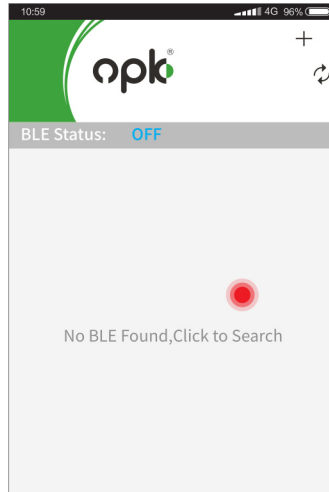


03. Turn on the bluetooth

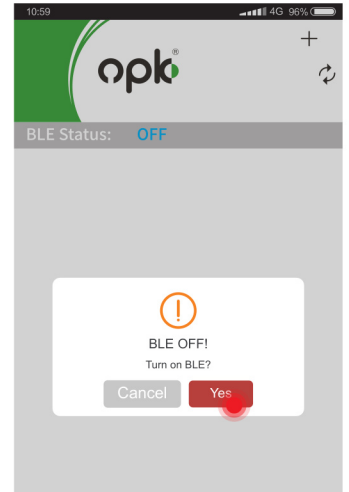


04. Click OK. Begin to search the equipment

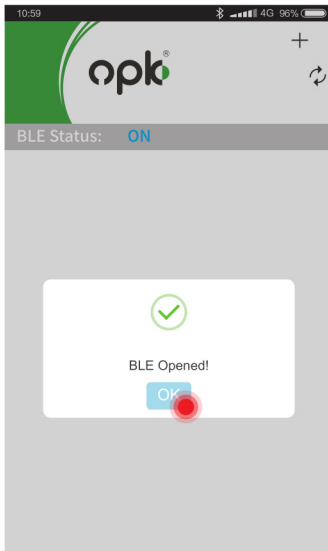


05. Find device

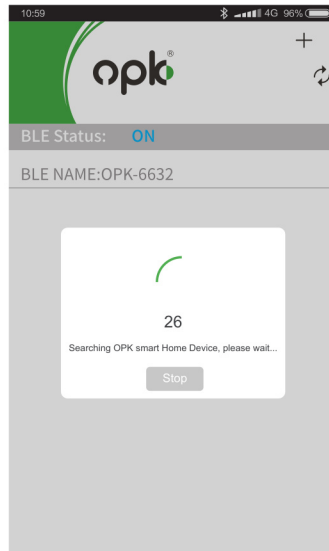


06. Press device name

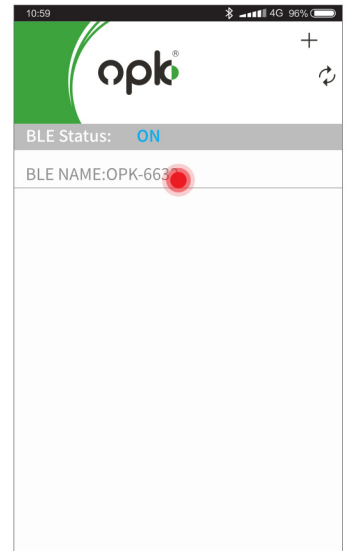


07. Device connecting

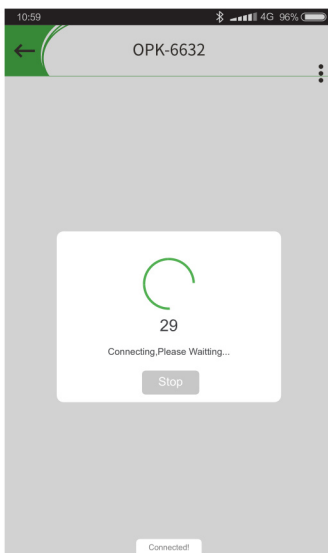


08. Click the signal at the top right

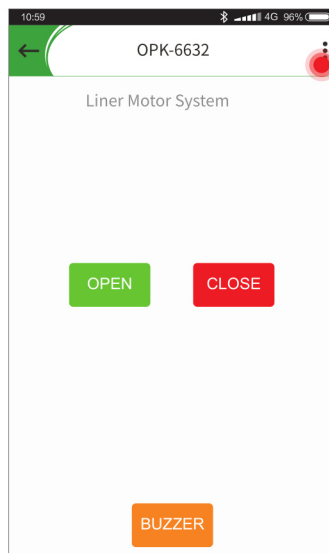


09. Open the operating parameters adjustment

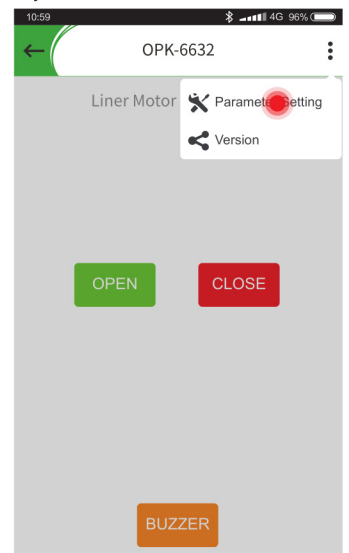


10. Enter the password and press OK

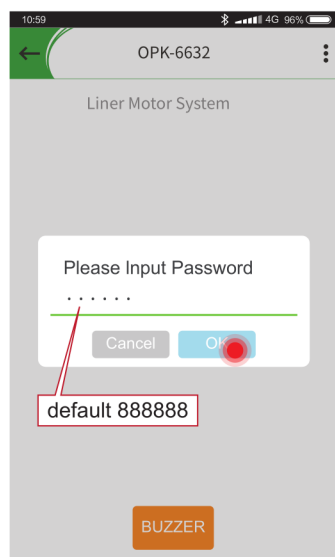


11. Press Coding button

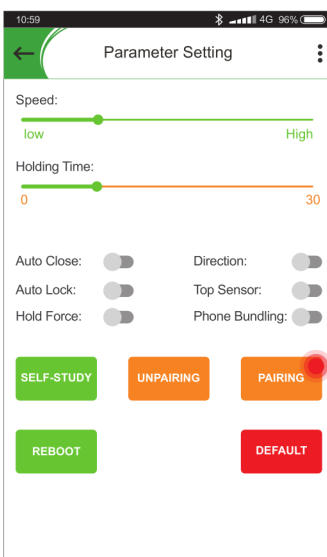

The continuous "di di di..." sound from the track system press the remote control; the sound stops, remote control coding is done.

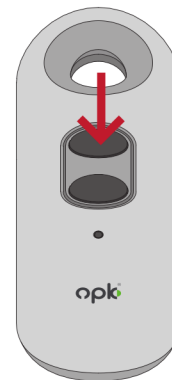

## 2 Battery replacement

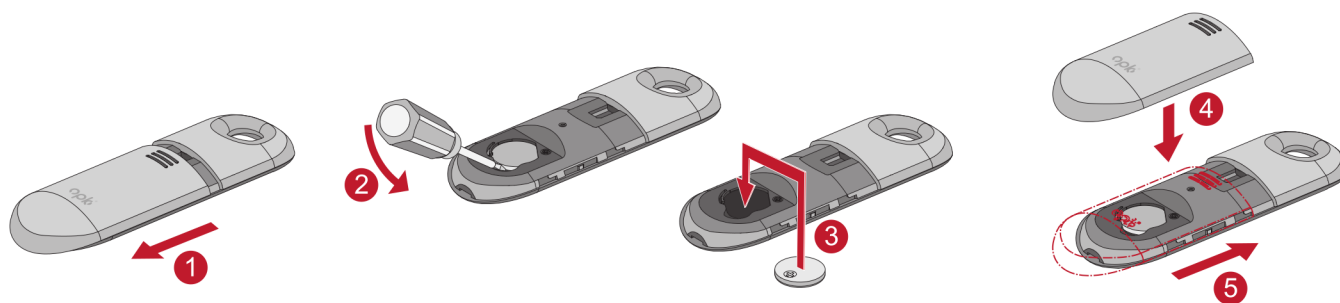

## 3 Technical Parameter

Power supply (Wireless receiver)	DC24V	Emission current (Transmitter)	<15mA
Static current	100mA	Receiver sensitivity	-96dBm
Action current	150mA	Life of battery (Transmitter)	The average press 100 time per day, can withstand 800 days
Main contact capacity (Wireless receiver)	N/A	Emission distance	Over 20 meters in no obstacles area
Contact suction holding time (Wireless receiver)	N/A	Product size (Transmitter)	128mm(L)X49MM(W)X19MM(H)
Power supply(Transmitter)	3V battery	Product size (Receiver)	155mm(L)X30MM(W)X20MM(H)
Standby current (Transmitter)	<0.01uA		